
7515

ORIGINAL | Lamps with glass wedge bases



Product benefits

- Wide product range
- Reliable quality

Product features

- Original spare parts

Product datasheet

Technical data


Electrical data

Power input	25 / 6 W
Nominal voltage	12.0 V
Nominal wattage	21/5 W
Power input tolerance	$\pm 6 / \pm 10$ %
Test voltage	13.5 V

Photometrical data

Luminous flux	440/35 lm
Luminous flux tolerance	$\pm 15 / \pm 20$ %

Dimensions & weight

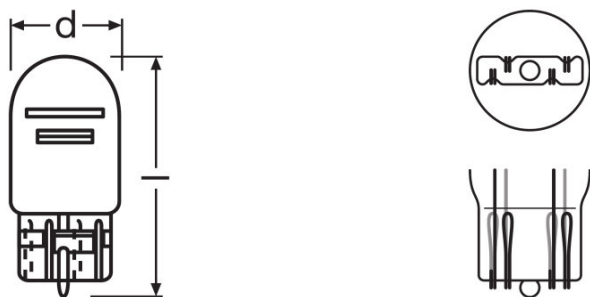

Length	47.5 mm
Diameter	20.0 mm
Product weight	6.80 g

Lifespan

Lifespan B3	250 / 600 h ¹⁾
Lifespan Tc	500 / 1600 h ¹⁾

¹⁾ Filament 1 / Filament 2

Additional product data

Base (standard designation)	W3x16q
-----------------------------	--------

Certificates & standards

ECE category	W21/5W
--------------	--------

Product datasheet

Country specific categorizations

Order reference	7515-02B 21/5W
------------------------	----------------

Country specific information

Product code	METEL code	SEG-No.	STK-Number	UK Org
4008321090713	OSRA7515	-	-	-

Product datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321090713	7515	Unpacked 1	35 mm x 14 mm x 18 mm	0.01 dm ³	6.00 g
4008321090720	7515	Folding carton box 10	52 mm x 54 mm x 144 mm	0.40 dm ³	90.00 g
4008321090737	7515	Shipping carton box 50	273 mm x 65 mm x 145 mm	2.57 dm ³	500.00 g
4008321662262	7515	Blister 2	95 mm x 70 mm x 28 mm	0.19 dm ³	18.60 g
4008321662279	7515	Shipping carton box 20	280 mm x 80 mm x 103 mm	2.31 dm ³	246.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.