



LEDVANCE

ledvance.com



Success
the easy
way



The new LEDVANCE LED luminaires
Redefining the standard to advance light
with and for you.


Light is personal

The standard. Redefined.

The new LEDVANCE LED luminaires.

LEDVANCE
OSRAM



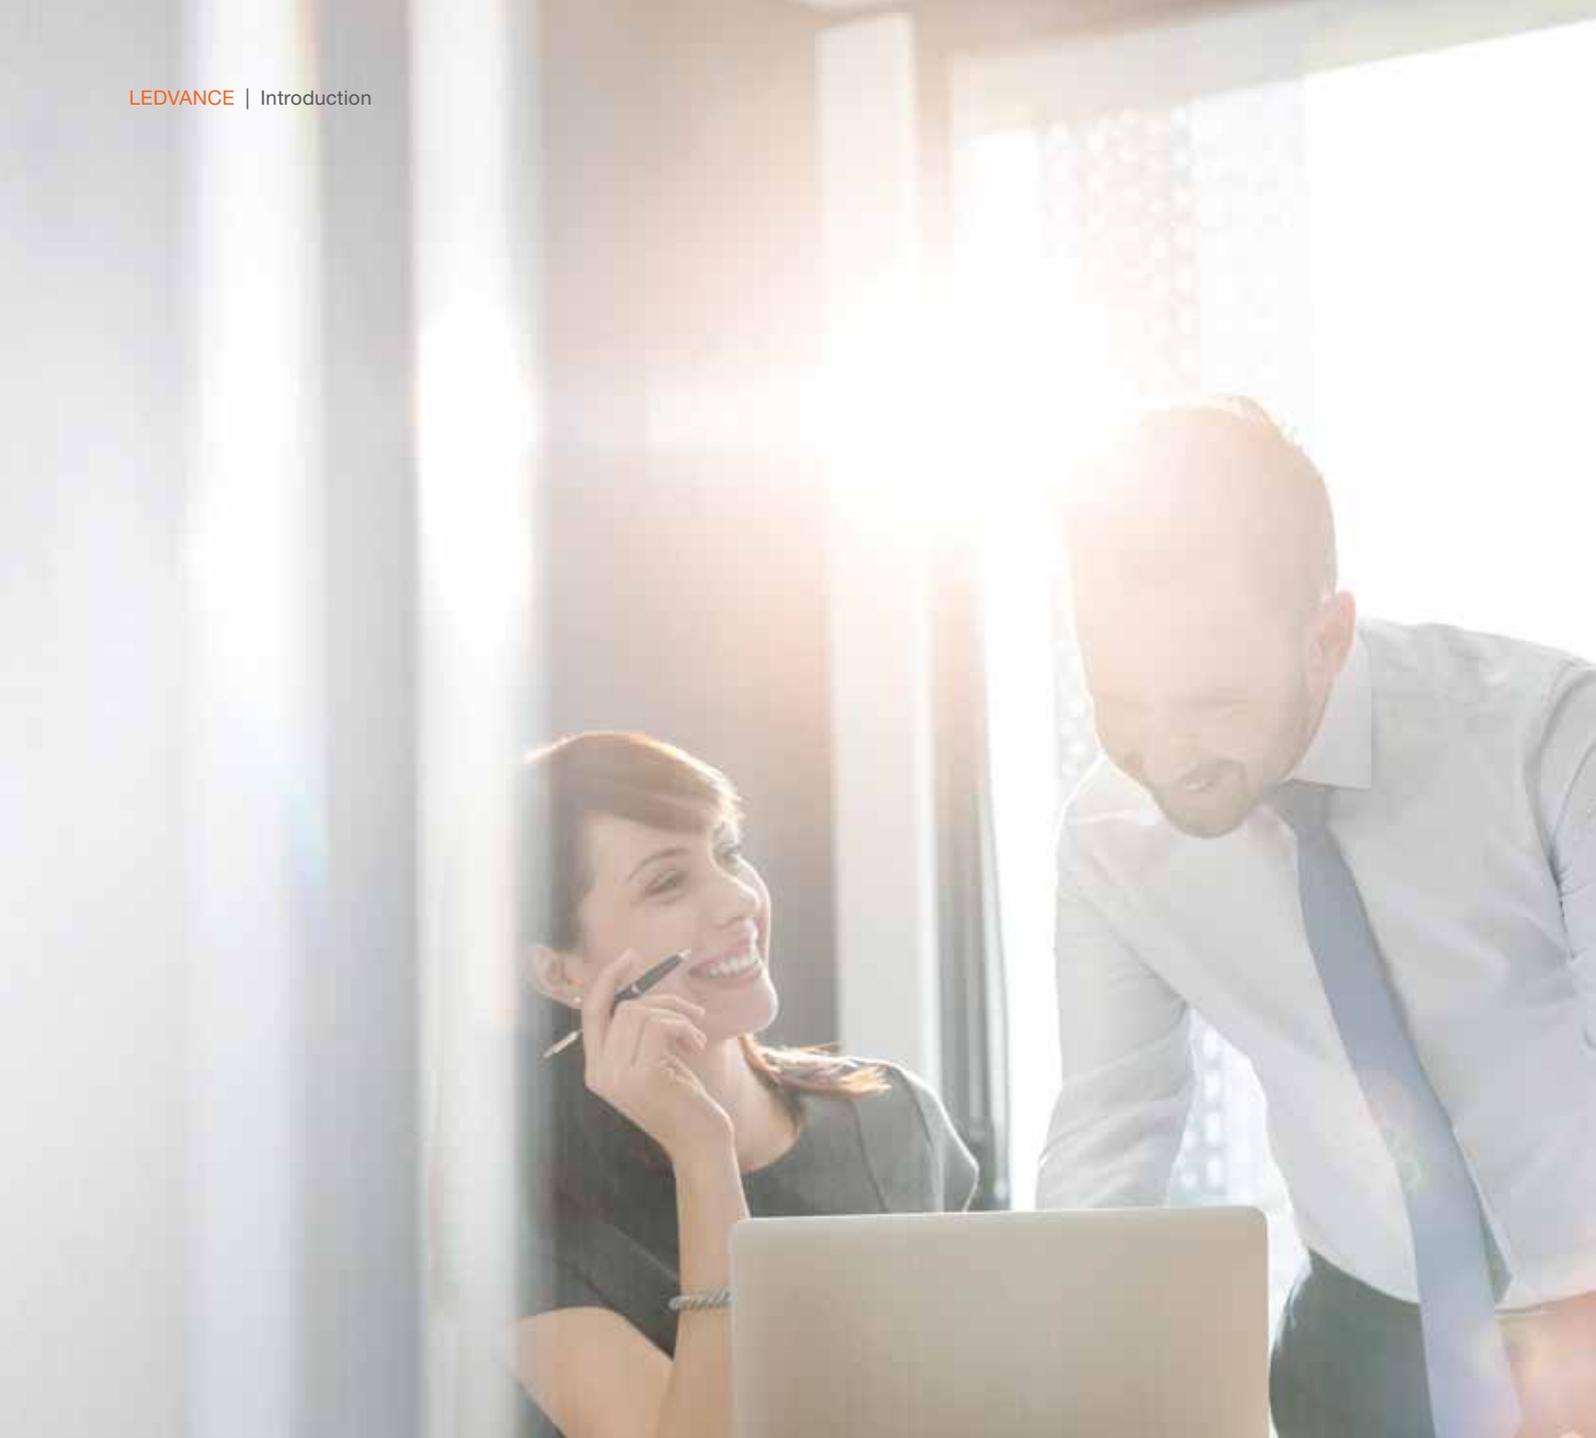

You & LEDVANCE: Let us illuminate your business

As your new key partner for OSRAM general lighting products, we would like to introduce ourselves and tell you more about the LEDVANCE company, our strategy, portfolio and – especially – your benefits.



LEDVANCE is a worldwide leader in innovative lighting products and connected lighting solutions. The company emerged from the classic lighting business of OSRAM and combines traditional general illumination with modern, forward-looking technology.

Our name reflects the company’s origins and our intentions for the future. LED refers to our core business in lighting and the growing importance of LED-based products, while ADVANCE stands for our ambition to become a driving force in the industry – in lighting and beyond.

We have very stable, long-standing customer relationships and a powerful distribution network with excellent market access around the globe. We know all the requirements of the general illumination market so we can cater for the individual demands of our direct and indirect customers. For us, advancing light is more than just a promise. It’s an attitude. In a dynamic market environment we are your strong and agile partner for mastering new challenges together and providing you with quality based on more than 100 years of experience. LEDVANCE may be a new company but our team is the same as before – we know the market and we know you.

So much is familiar. Yet so much is new and exciting. For example our new LEDVANCE® LED luminaire portfolio. Start exploring it right here in the brochure. If you have any questions, our local teams of experts look forward to helping you.

See also www.ledvance.com.au to discover even more of our attractive products.

COMPANY:



OFFERS

BRANDS:



IN

IN

PRODUCTS:

LAMPS,
SMART HOME LAMPS

LUMINAIRES

The new LEDVANCE® LED luminaires: The standard. Redefined.

Straightforward, efficient and easy-to-install products with proven quality and an optimum price/performance ratio, perfectly matched to your everyday requirements. That's precisely what we at LEDVANCE understand by advanced light. And that's precisely why we have developed the new LEDVANCE® LED luminaires – to redefine the standard.

What are the benefits of LEDVANCE® LED luminaires for you as a lighting professional?

LEDVANCE® LED luminaires are the new no-frills choice for when you simply need the right light for common applications. The luminaires have all the necessary features and functions and offer precisely what they have been developed for – no more and no less.

The composition of the portfolio redefines the standard because we know your needs and wishes as lighting professionals. In addition to clean-cut design, proven quality and high efficacy, the greatest benefits of the new LEDVANCE® LED luminaires are their ease of installation and excellent price/performance ratio. The results are perfectly clear. LEDVANCE® LED luminaires make your day-to-day work easier – because for virtually every routine application there is now a LEDVANCE® luminaire that meets all the requirements perfectly. Or in short: success the easy way!



The LEDVANCE® LED luminaire offering is being continually developed and expanded.




Downlight



Spot



Batten



Panel

*Refer to www.ledvance.com/guarantee for precise conditions




The right LEDVANCE® LED luminaire for every need and every application

All LEDVANCE® LED luminaires are characterised by their modern designs which are uniform within each product family. They comply with all the applicable Australian and International Standards and Regulations and possess all the relevant certificates and approvals (RCM, CE, CB, TÜV).

The luminaires are equipped exclusively with high-quality LED modules in the highest energy efficiency classes (A, A+ and A++).



For all LEDVANCE® LED luminaires:

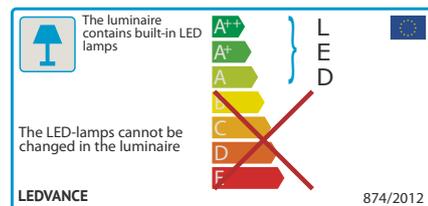

Ceiling Light



Damp Proof



High Bay



Floodlight

Choose LEDVANCE® LED luminaires and give your business a boost. Impress your customers and make your own work a lot easier.



SUPERSTAR LED DOWNLIGHT

LED downlights.
Redefined.

The LED SUPERSTAR Downlight is a dimmable* 10.5W downlight with high output and efficiency, boasting up to 900 lumen output. With its integrated driver, compact dimensions and flush diffuser design, the LED SUPERSTAR downlight provides a seamless and clean design which is ideal for the modern home or a functional office space. The downlight comes pre-wired with a 1.2m flex & plug for quick and simple installation.

Recommended applications

- General lighting for homes
- Stairways and corridors
- Public rooms and foyers
- Shops




Special benefits

- IPART Approved
- Consistent colour ≤ 5 SDCM
- CRI > 80
- High performance 10.5W LED downlight
- Up to 900 lumens light output
- Flush diffuser design with wide 100° beam spread
- Dimmable* on leading and trailing edge phase dimmers
- Available in 3000K, 4000K and 5000K
- Pre-wired with 1.2m flex and plug for easy installation

*For further information on dimming performance and for a list of preferred leading and trailing edge dimmers please see www.osram.com.au

SUPERSTAR LED Downlight 10.5 W (ceiling cutout: 90 mm)

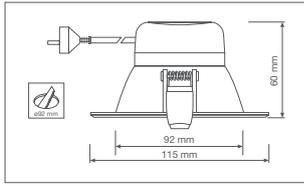

Product name	Product Code (EAN)	Colour	V	W	lm	lm/W	K	Beam angle	CRI	t(h) ³	Dimensions D x H [mm]	Guarantee [years]*
LED SUPERSTAR DL 830	4052899340763	White	220-240	10.5	800	75	3000	100°	>80	30,000	115x60	3
LED SUPERSTAR DL 840	4052899340800	White	220-240	10.5	850	80	4000	100°	>80	30,000	115x60	3
LED SUPERSTAR DL 850	4052899340787	White	220-240	10.5	900	85	5000	100°	>80	30,000	115x60	3

*Refer to www.ledvance.com/guarantee for precise conditions



LEDVANCE® SPOT LED Pro

LED spotlights.
Redefined.

The recessed LEDVANCE® SPOT LED Pro is a direct replacement for halogen spots, comprising of six luminaires in three wattages (2W, 5W and 10W). In 3000K colour temperature the luminaires achieve a luminous flux of up to 600 lumen and a luminous efficacy of up to 70 lumens per watt. They significantly cut electricity and maintenance costs due to energy savings of up to 90 percent and have a rated lifespan of up to 30,000 hours. A circular cut-out in the ceiling cavity is all that is required for initial installation of these luminaires. These LED spots have an aluminium housing and feature high power COB LED with duo optic design to replicate the halogen spot effect. They can be used in both residential buildings and professional applications.

Recommended applications

- Cabinet lighting (2W)
- Jewellery shop displays
- Office lighting
- Residential
- Hospitality and Retail
- Stairways and corridors



Special benefits

- Available in 2W, 5W, 10W
- High power COB delivers high lumen packages in a compact fixture housing
- Duo-optic design best replicates the halogen spot effect
- High grade aluminum housing and front ring ensure reliable operation
- External driver design reduces overall product height to fit in tight ceiling spaces
- Standard 3000K CCT
- High CRI >80
- Long 30,000hr lifetime reduces maintenance costs

LEDVANCE® SPOT LED Pro 2W (ceiling cutout: 44-46mm)IP
20PRO-
TECTION
CLASS
II

Product name	Product Code (EAN)	Colour	V	W	lm	CRI	lm/W	K	△	t(h) ³	Dimensions D × H [mm]	Guarantee [years]*
Spot LED Pro 2W/3000K	4058075800687	White	220-240	2	95	80	47	3000	10°	30,000	52 × 30	3

LEDVANCE® SPOT LED Pro 5W (ceiling cutout: 55-60mm)IP
20PRO-
TECTION
CLASS
II

Product name	Product Code (EAN)	Colour	V	W	lm	CRI	lm/W	K	△	t(h) ³	Dimensions D × H [mm]	Guarantee [years]*
Spot LED Pro 5W/3000K	4058075800724	White	220-240	5	350	80	70	3000	14°	30,000	68 x 52	3
Spot LED Pro 5W/3000K	4058075800748	White	220-240	5	350	80	70	3000	24°	30,000	68 x 52	3

LEDVANCE® SPOT LED Pro 10W (ceiling cutout: 70-75mm)IP
20PRO-
TECTION
CLASS
II

Product name	Product Code (EAN)	Colour	V	W	lm	CRI	lm/W	K	△	t(h) ³	Dimensions D × H [mm]	Guarantee [years]*
Spot LED Pro 10W/3000K	4058075800809	White	220-240	10	600	80	60	3000	14°	30,000	85 x 61	3
Spot LED Pro 10W/3000K	4058075800823	White	220-240	10	600	80	60	3000	24°	30,000	85 x 61	3
Spot LED Pro 10W/3000K	4058075800847	White	220-240	10	600	80	60	3000	36°	30,000	85 x 61	3

*Refer to www.ledvance.com/guarantee for precise conditions



LEDVANCE® LEDVALUE Batten



LED linear luminaires.
Redefined.

The LEDVANCE® LEDVALUE Batten is available in two lengths (7W/2ft and 12W/4ft) and two colour temperatures (4000K and 6500K) achieving a luminous flux of up to 1350 lumen and a luminous efficacy of up to 114 lumen per watt (operating temperature from -20°C to $+40^{\circ}\text{C}$). Providing a seamless length of consistent light the LEDVANCE® LEDVALUE Batten is an effective indoor luminaire suitable for cove lighting, under cabinet lighting and corridors.


Recommended applications

- Under cabinet lighting
- Cove lighting
- Corridors and entrances

Special benefits

- Continuous lighting with uniform illumination
- Available in two lengths, 2ft and 4ft
- Available in two colour temperatures 4000K and 6500K
- CRI >80
- DIY installation: Comes with power lead and plug, flexible joiner and mounting clips
- Lifetime of up to 20,000 hours
- Maximum connection: 16 pieces of 7W, 8 pieces of 12W or mixed lengths <114W total power

LEDVANCE® LEDVALUE Batten

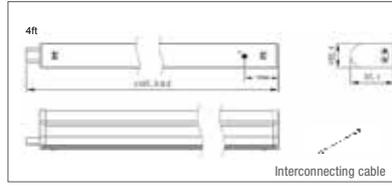

Product name	Product Code (EAN)	Colour	V	W	lm	CRI	lm/W	K	△	t(h) ³	Dimensions L x W x H [mm]	Guarantee [years]*
LEDVALUE BAT VK2 7W/840	TBA	White	220-240	7	800	80	114	4000	160°	20,000	597.5 x 22 x 37	2
LEDVALUE BAT VK2 7W/865	TBA	White	220-240	7	800	80	114	6500	160°	20,000	597.5 x 22 x 37	2
LEDVALUE BAT VK4 12W/840	TBA	White	220-240	12	1350	80	112	4000	160°	20,000	1197 x 22 x 37	2
LEDVALUE BAT VK4 12W/865	TBA	White	220-240	12	1350	80	112	6500	160°	20,000	1197 x 22 x 37	2

*Refer to www.ledvance.com/guarantee for precise conditions



LEDVANCE® Panel

Recessed LED luminaires.
Redefined.

The LEDVANCE® Panel family comprises 6 luminaires in 32W and 53W and two light colors 4000K and 6500K, achieving a luminous flux of up to 5000 lumens and a luminous efficacy of up to 94 lumen per watt (operating temperature from -10 °C to +40 °C). These LED recessed luminaires have an aluminum housing and diffuser made from particularly stable plastic (PS).

Recommended applications


- Offices and conference rooms
- Reception areas and foyers
- Corridors and elevators



Special benefits


- Direct replacement for traditional troffer luminaires (2x36 W/3x18 W/3x36 W/4x36 W)
- Long 30,000 hour lifetime
- Uniform light output
- Advanced flexibility due to external driver (included)
- Elegant, slim aluminum frame in white (RAL 9003)
- High power factor >0.95
- Flicker-free lighting
- Recess mount with optional surface mount and suspension kit

LEDVANCE® Panel 606 and 312

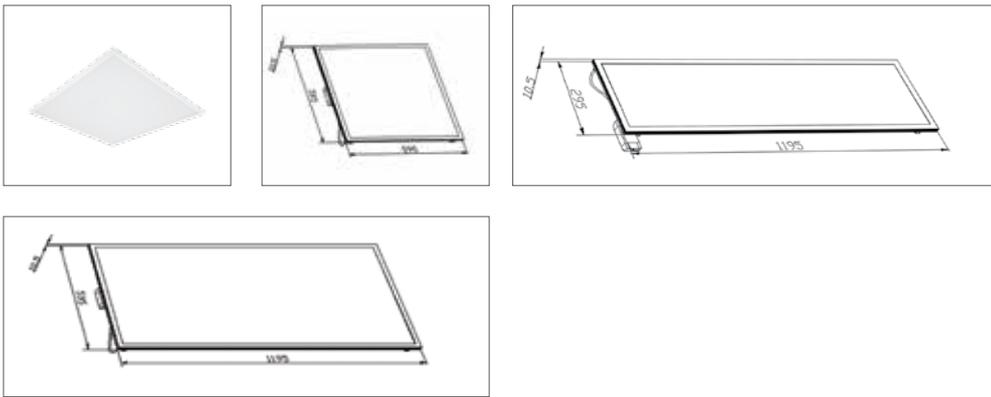

Product name	Product Code (EAN)	Colour	V	W	lm	CRI	lm/W	K	°	t[h] ³	Dimensions L x W x H [mm]	Guarantee [years]*
PANEL LED 0606 32W/4000K	4058075003231	White	220-240	32	3000	80	94	4000	160°	30,000	595 x 595 x 10.5	3
PANEL LED 0606 32W/6500K	4058075003255	White	220-240	32	3000	80	94	6500	160°	30,000	595 x 595 x 10.5	3
PANEL LED 0312 32W/4000K	4058075003279	White	220-240	32	3000	80	94	4000	160°	30,000	1195 x 295 x 10.5	3
PANEL LED 0312 32W/6500K	4058075003293	White	220-240	32	3000	80	94	6500	160°	30,000	1195 x 295 x 10.5	3
PANEL LED 0612 53W/4000K	4058075003316	White	220-240	53	5000	80	94	4000	160°	30,000	1195 x 595 x 10.5	3
PANEL LED 0612 53W/6500K	4058075003330	White	220-240	53	5000	80	94	6500	160°	30,000	1195 x 595 x 10.5	3

LEDVANCE® Suspension Kit

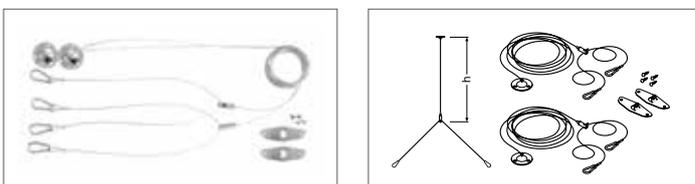

Product name	GTIN (EAN)	W	Replacement for ²	lm	lm/W	K	°	t[h] ³	Protection class	Dimensions H [mm]	Guarantee [years]
Panel LED Suspension Kit	4058075003392	—	—	—	—	—	—	—	—	3,000	—

*Refer to www.ledvance.com/guarantee for precise conditions



LEDVANCE® LEDVALUE Ceiling Light



Surface mounted LED luminaires.
Redefined.

The LEDVANCE® LEDVALUE Ceiling Light comprises nine luminaires in three wattages (23W, 20W and 10W) and three colour temperatures (3000K, 4000K and 6500K). Giving uniform illumination and great colour consistency (SDCM 6), the LEDVALUE Ceiling Light is a Class 1 luminaire for indoor use. These LED wall and ceiling luminaires have an aluminum housing and a high quality PMMA diffuser.


Recommended applications

- Corridors, hallways and staircases
- Foyers and entrances
- General home use

Special benefits

- Available in 3 Wattages and 3 Colour temperatures—suitable for various applications
- Uniform illumination
- Direct connection to AC power supply (with integrated control gear)
- Colour rendering >80, beam angle 120°
- Up to 15,000 hours lifetime

LEDVANCE® LEDVALUE Ceiling Light



Product name	Product Code (EAN)	Colour	V	W	lm	CRI	lm/W	K	Δ	t(h) ³	Dimensions D x H [mm]	Guarantee [years]*
PANEL LED 23W/3000K	4052899424043	White	220-240	23	1750	>80	75	3000	120°	15,000	350 x 80.6	1
PANEL LED 23W/4000K	4052899424067	White	220-240	23	1850	>80	80	4000	120°	15,000	350 x 80.6	1
PANEL LED 23W/6500K	4052899424081	White	220-240	23	1850	>80	80	6500	120°	15,000	350 x 80.6	1
PANEL LED 20W/3000K	4052899424357	White	220-240	20	1500	>80	75	3000	120°	15,000	350 x 80.6	1
PANEL LED 20W/4000K	4052899424333	White	220-240	20	1600	>80	80	4000	120°	15,000	350 x 80.6	1
PANEL LED 20W/6500K	4052899424371	White	220-240	20	1600	>80	80	6500	120°	15,000	350 x 80.6	1
PANEL LED 10W/3000K	4052899424395	White	220-240	10	700	>80	70	3000	120°	15,000	250 x 80.6	1
PANEL LED 10W/4000K	4052899424418	White	220-240	10	800	>80	80	4000	120°	15,000	250 x 80.6	1
PANEL LED 10W/6500K	4052899424432	White	220-240	10	800	>80	80	6500	120°	15,000	250 x 80.6	1


10W



20W



23W

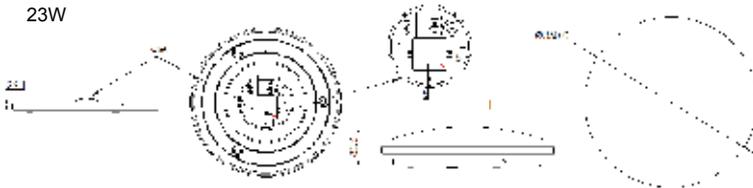

*Refer to www.ledvance.com/guarantee for precise conditions



LEDVANCE® Damp Proof Pro LED



Damp-proof LED luminaires.
Redefined.

The LEDVANCE® Damp Proof family comprises four luminaires in two wattages (20W and 40W) with a standard colour temperature of 6500K. Available in one standard 1200mm length, either with or without through wiring the LEDVANCE® Damp Proof has an operating temperature from -10°C to $+40^{\circ}\text{C}$. These LED damp-proof luminaires with IP65 have a housing and diffuser made from robust plastic (PC) and stainless-steel clamps.


Recommended applications

- Heavy and light industry production
- Assembly lines & recreational facilities
- Warehouse & storage facilities
- Loading areas
- Train & airport station depot
- Sports halls & supermarket
- Humid and dirty application areas
- Parking facilities
- Construction sites

Special benefits

- Available in 20W & 40W, two lumen packages
- Standard 1200mm length ensure direct replacement of a traditional T8 Damp proof fixture
- Replaces traditional 1 x 36W and 2 x 36W T8 fluorescent battens
- Stand alone and through wiring versions
- High system lumen efficacy: $>100\text{lm/W}$
- High color rendering: CRI >80
- Standard 6500K CCT
- Anodised aluminium, anti-corrosion base plate with high reflectiveness
- Effective heat dissipation through base plate for improved system efficiency
- UV-stabilized polycarbonate prismatic diffuser for uniform light distribution and high efficiency
- Anti-corrosion Stainless steel clips
- 10 clips (5x2 sides) design ensures IP65 throughout lifetime
- IK08 impact protection
- High Power Factor: PF >0.95
- Long 30,000hr lifetime reduces maintenance costs
- Includes mounting brackets and hook for chain suspension

LEDVANCE® Damp Proof Pro LED

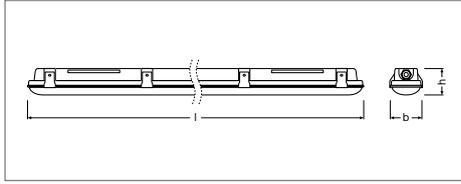

Product name	Product Code (EAN)	Colour	V	W	lm	CRI	lm/W	K	△	t _{bj} ³	Dimensions L x W x H [mm]	Guarantee [years]*
DAMPProof PRO LED12 20W	4058075003422	grey	220-240	20	2000	>80	100	6500	120°	30,000	1270 x 85 x 80	3
DAMPProof PRO LED12 40W	4058075003446	grey	220-240	40	4000	>80	100	6500	120°	30,000	1270 x 118 x 80	3
DAMPProof PRO LED12 20WTW	4058075003460	grey	220-240	20	2000	>80	100	6500	120°	30,000	1270 x 85 x 80	3
DAMPProof PRO LED12 40WTW	4058075003484	grey	220-240	40	4000	>80	100	6500	120°	30,000	1270 x 118 x 80	3

*Refer to www.ledvance.com/guarantee for precise conditions



LEDVANCE® HighBay LED

High-bay LED luminaires.
Redefined.



LEDVANCE® HighBay LED is the new, reliable LED luminaire lighting solution for medium to high ceiling installation requirements in large consumer assembly areas and industrial facilities. The LEDVANCE® High Bay family comprises three luminaires with 120 W (90° beam angle) and 150 W (90° beam angle) and 200W (70° beam angle), achieving a luminous flux of 12,000 to 20,000 lumens and a luminous efficacy of 100 lumen per watt (operating temperature from -40 °C to +60 °C). This LED high-bay luminaire has a colour temperature of 6500K and an IP65 rating, with aluminum housing and a lens made from robust plastic (PC).


Recommended applications

- General lighting for high ceilings
- Heavy and light industry production
- Assembly lines
- Warehouse & storage facilities
- Commercial assembly halls
- Loading areas
- Train & airport station halls
- Malls & supermarket
- Aircraft hangers

Special benefits

- Available in 3 lumen packages
- High color rendering: CRI >80
- High system lumen efficiency >100lm/W
- Standard 6500K CCT
- Integrated high power factor driver: PF > 0.95
- Aluminum die-cast housing
- Single piece heat resistant optics/lens
- 90°(120W and 150W) and 70°(200W) light distribution
- IP65 weatherproof
- IK08 impact protection
- Long 50,000hr lifetime
- Suspension chain mountable hook and screw thread for pole mount come standard (chain or pole not included)
- Optional surface mounting bracket
- Unique LEDVANCE heat sink design with air channels for advanced cooling

LEDVANCE® HighBay LED

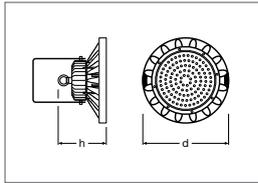IP
65PRO-
TECTION
CLASS
I

Product name	Product Code (EAN)	Colour	V	W	lm	CRI	lm/w	K		t [h] ³	Dimensions D x H [mm]	Guarantee [years]*
HIGHBAYLED PRO 120W/6500K	4058075003910	black	100-240	120	12,000	>80	100	6500	90°	50,000	295 x 143	3
HIGHBAYLED PRO 150W/6500K	4058075003934	black	100-240	150	15,000	>80	100	6500	90°	50,000	328 x 138	3
HIGHBAYLED PRO 200W/6500K	4058075003958	black	100-240	200	20,000	>80	100	6500	70°	50,000	380 x 151	3

Accessories/Mounting



Suspended mounting



Mounting via bracket



Adjustment of bracket angle

*Refer to www.ledvance.com/guarantee for precise conditions



LEDVANCE® Floodlight LED & Floodlight LED PRO

LED Outdoor luminaires.
Redefined.

The LEDVANCE® Floodlight family comprises eight luminaires in four wattages (10W, 20W, 30W, 50W) and two light colors (3000K, 6500K), achieving a luminous flux of up to 4500 lumens. They are weatherproof (IP65) and have a impact resistance of IK07. These LED outdoor luminaires have a glass cover and a housing made of premium grade plastic.

The LEDVANCE® Floodlight LED PRO series comprises six luminaires in three different wattages (70W, 100W, 150W) and two colour temperatures (3000K, 6500K), achieving a luminous flux of up to 13,500 lumens. The PRO series are encased in a one piece high grade die-cast aluminum housing and heat sink. With highly efficient LEDs and a long lifetime, they maximise energy savings and reduce maintenance costs. Ideal for replacing traditional high pressure sodium and metal halide floodlights. The robust IP65 and IK08 design enables it to be used for various commercial outdoor applications.

Recommended applications

- Residential areas and courtyards
- Building facades and security
- Parking lots
- Architecture and landscape lighting
- Industrial warehouses lighting
- Billboard and advertising lighting
- Security, amenity and parking area lighting
- Spot lighting




Standard 20W

Pro 100W

Special benefits

- Available in a wide range of wattages from 10W to 150W
- CRI >80
- Long 30,000hr lifetime reduces maintenance costs
- High system efficiency up to 90lm/W
- Standard CCT: 6500K & 3000K
- Aluminum heat sink
- Operating temperature from -30 °C to +50 °C
- Premium grade polycarbonate front frame to reduce overall product weight (10W,20W,30W,50W)
- Robust housing in die-cast aluminium (70W,100W,150W PRO Series)
- Elegant slim design reduces windage
- Tempered frosted front glass to increase uniformity
- PIR sensor versions available (30W and 50W)
- IP65
- IK07 (10W,20W,30W,50W), IK08 (70W, 100W, 150W PRO Series) impact protection
- Available in black housing

LEDVANCE® Floodlight LED

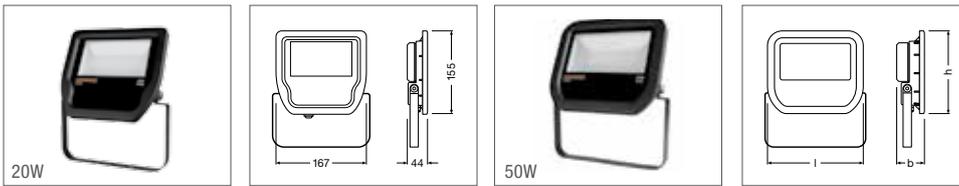


Product name	Product Code (EAN)	Colour	V	W	lm	CRI	lm/W	K	△	t[h] ³	Dimensions L x H x D [mm]	Guarantee [years] ⁴
FLOODLIGHT LED 10W/6500K	4058075003507	black	220-240	10	800	>80	80	6500	100°	30,000	127 x 117 x 39	3
FLOODLIGHT LED 20W/6500K	4058075003521	black	220-240	20	1800	>80	90	6500	100°	30,000	167 x 155 x 44	3
FLOODLIGHT LED 30W/6500K	4058075003545	black	220-240	30	2700	>80	90	6500	100°	30,000	167 x 155 x 44	3
FLOODLIGHT LED 50W/6500K	4058075003569	black	220-240	50	4500	>80	90	6500	100°	30,000	216 x 188 x 62	3
FLOODLIGHT LED 50W/3000K	4058075003583	black	220-240	50	4500	>80	90	3000	100°	30,000	216 x 188 x 62	3
FLOODLIGHT LED 30W/6500KSR	4058075003842	black	220-240	30	2700	>80	90	6500	100°	30,000	167 x 155 x 44	3
FLOODLIGHT LED 50W/6500KSR	4058075003866	black	220-240	50	4500	>80	90	6500	100°	30,000	216 x 188 x 62	3
FLOODLIGHT LED 50W/3000KSR	4058075003880	black	220-240	50	4500	>80	90	3000	100°	30,000	216 x 188 x 62	3

LEDVANCE® Floodlight LED PRO




Product name	Product Code (EAN)	Colour	V	W	lm	CRI	lm/W	K	△	t[h] ³	Dimensions L x H x D [mm]	Guarantee [years] ⁴
FLOODLIGHT LED PRO 70W/6500K VS1	4058075003613	black	220-240	70	6300	>80	90	6500	100°	30,000	194 x 202 x 76	3
FLOODLIGHT LED PRO 70W/3000K VS1	4058075003637	black	220-240	70	6300	>80	90	3000	100°	30,000	194 x 202 x 76	3
FLOODLIGHT LED PRO 100W/6500K VS1	4058075003651	black	220-240	100	9000	>80	90	6500	100°	30,000	237 x 247 x 82	3
FLOODLIGHT LED PRO 100W/3000K VS1	4058075003675	black	220-240	100	9000	>80	90	3000	100°	30,000	237 x 247 x 82	3
FLOODLIGHT LED PRO 150W/6500K VS1	4058075003699	black	220-240	150	13500	>80	90	6500	100°	30,000	269 x 298 x 104	3
FLOODLIGHT LED PRO 150W/3000K VS1	4058075003712	black	220-240	150	13500	>80	90	3000	100°	30,000	269 x 298 x 104	3

30W Floodlight with PIR sensor

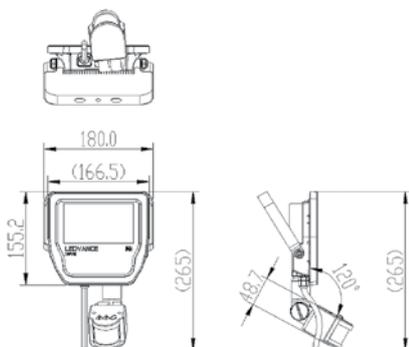

50W Floodlight with PIR sensor

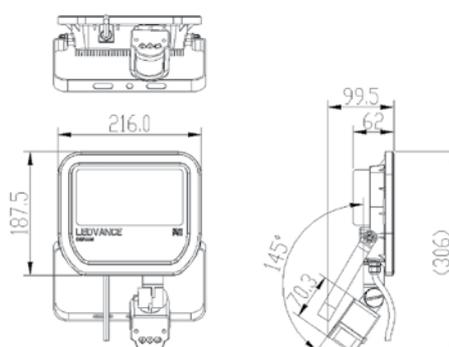

*Refer to www.ledvance.com/guarantee for precise conditions

Most common products for the application areas



PRODUCTS	APPLICATIONS					
	SHOP	OFFICE	HOSPITALITY	INDUSTRY	TRANSPORTATION/ OUTDOOR	HEALTHCARE
SUPRSTAR LED Downlight	✓	✓	✓			✓
LEDVANCE® Spot			✓			✓
LEDVANCE® Batten	✓					
LEDVANCE® Panel	✓	✓		✓		✓
LEDVANCE® Ceiling Light		✓	✓			
LEDVANCE® Damp Proof				✓	✓	
LEDVANCE® HighBay				✓	✓	
LEDVANCE® Floodlight					✓	

LEDVANCE® LED luminaires: inspiring applications



The new LEDVANCE® LED luminaires deliver ideal solutions for a variety of applications. Our application table recommends the most appropriate LEDVANCE® product families for six main areas of application. Of course, these areas will also provide opportunities for you to use other LEDVANCE® luminaires. And you are sure to find uses for all of our LED luminaires in many other application areas. Make your choice – and be inspired!





ledvance.com

LEDVANCE PTY LTD
Head Office
Level 11, 423 Pennant Hills Road
Pennant Hills NSW 2120
Phone 1300 467 726
www.ledvance.com.au



Subject to change without notice. Errors and omission excepted.