




Material: PPMA Defuser Cover
Finishing: Aluminum

600mm W

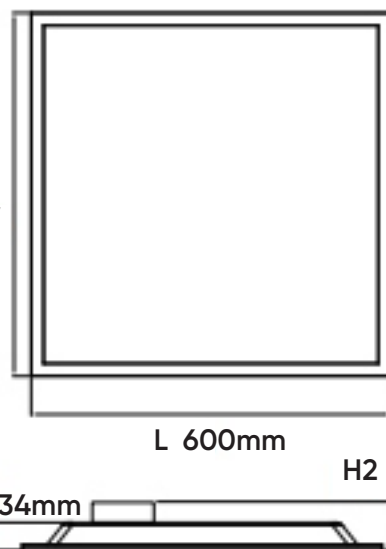

Mounting: Suspended / Recessed / Surface Mounted

*Control



CRI
>80

100
lm/W

Lifetime
50.000
hrs

IP20

IP44

IP65

220-240
V AC
50/60Hz

***Accessories available upon request, depending on installation method



Suspension kit



Mounting brackets



Surface-mounted
aluminum frame

Benefits


Simple shape with stable quality

- Strong frame with extrusion aluminum
- Simple design solution with a 34mm height

Applications

Supermarket, Offices, Schools, Metro stations,
Banks, Stores, Public buildings...

Photometrics / LED Data

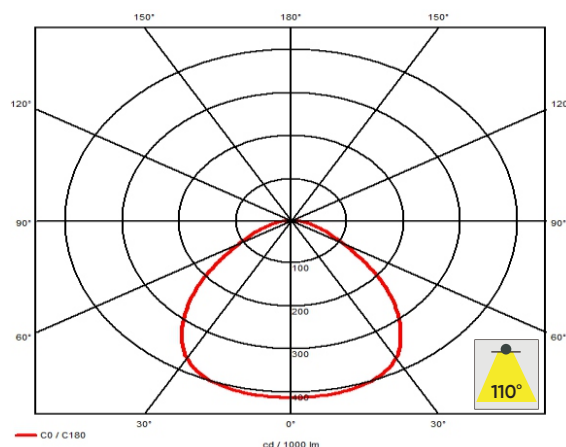

PRODUCT PARAMETERS

Model No	Power	Size (LxWxH)mm	CTT	Lumen
IP20 VERSION				
HKD-PL-V1-0306-25W	25W	595x295x34	3000K/4000K/6500K	2,500lm
HKD-PL-V1-0312-40W	40W	1195x295x34		4,000lm
HKD-PL-V1-0606-40W	40W	595x595x34		4,000lm
HKD-PL-V1-0606-60W	60W	595x595x34		6,000lm
HKD-PL-V1-0612-60W	60W	1195x595x34		6,000lm
HKD-PL-V1-0612-80W	80W	1195x595x34		8,000lm
IP44 VERSION				
HKD-PL-V2-0306-25W	25W	595x295x34	3000K/4000K/6500K	2,500lm
HKD-PL-V2-0312-40W	40W	1195x295x34		4,000lm
HKD-PL-V2-0606-40W	40W	595x595x34		4,000lm
HKD-PL-V2-0606-60W	60W	595x595x34		6,000lm
HKD-PL-V2-0612-60W	60W	1195x595x34		6,000lm
HKD-PL-V2-0612-80W	80W	1195x595x34		8,000lm

Custom Orders Available (IP65 Option)