

Icutronic constant voltage LED DRIVERS

IT D0 xxx/220-240/24...

New Family of DALI-2 and 0-10V dimmable LED Drivers for indoor




Highlights & USP

- Multi protocol dimming: DALI-2, 0/1-10V, PWM, RES
- 24,2 V output + 1,5 V adjustable
- CC mode with 18...24 V output option
- Low to High power handling: 36 W to 200 W family
- 2 independent output channels, also with DT8 TW
- 1CH version for simpler applications
- Dimming range 1...100%
- Touch-DIM (also in TW) and corridor functions
- t_a range -20...+50° C

Applications

- Hospitality
- Indoor architectural applications
- Cove lighting
- Shops

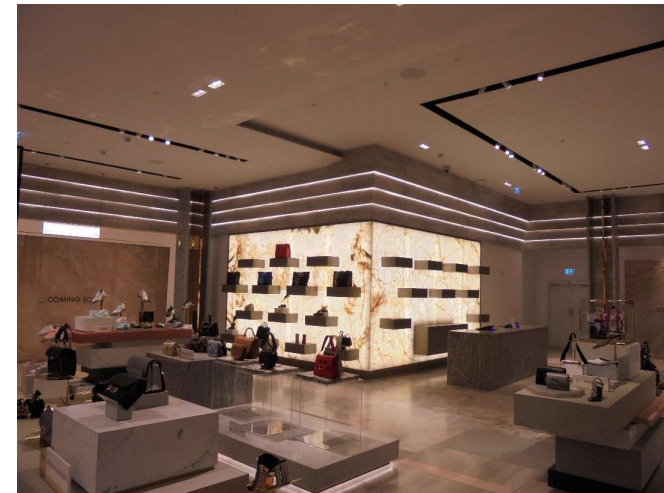

inventronics