


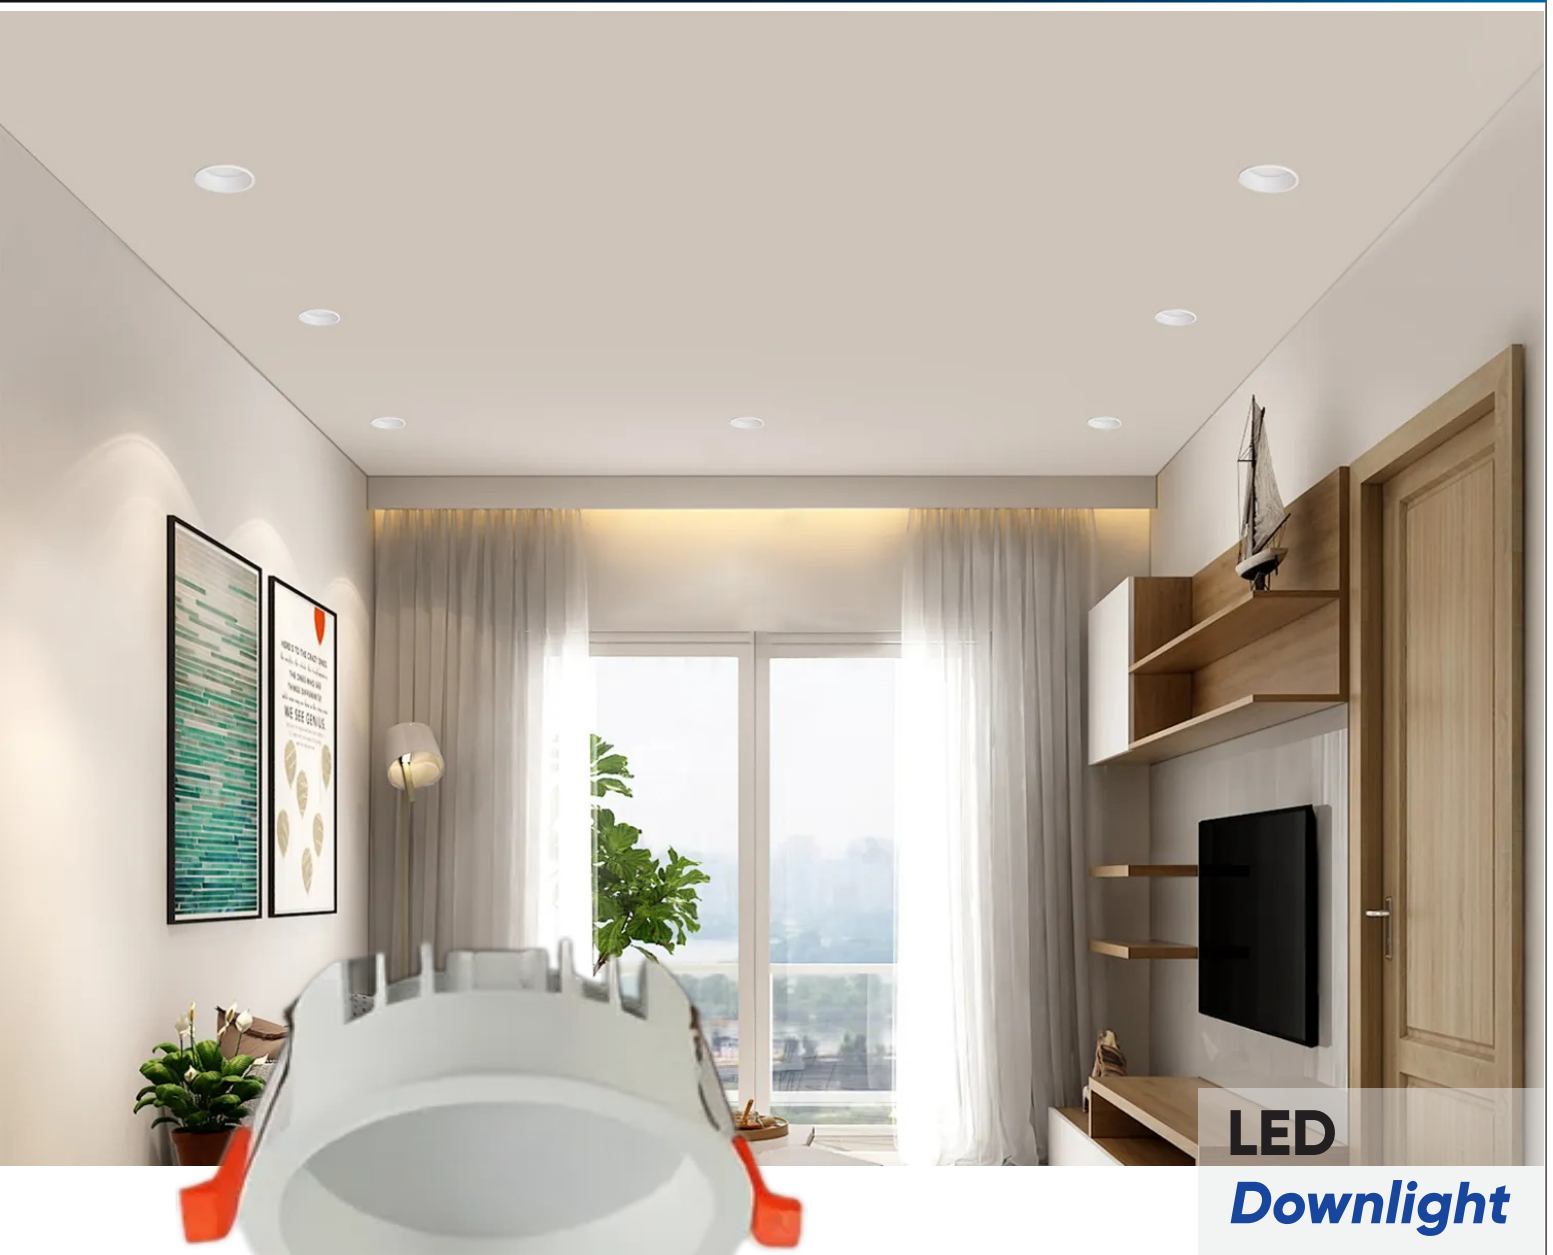

LED Downlight

The HKD-DL09-SLR LED Downlight is a premium lighting solution designed to deliver exceptional performance and long-lasting durability. Engineered with a high color rendering index (CRI 90), it provides true-to-life, natural lighting that enhances the visual appeal of any space. Its robust design ensures reliability, while the superior illumination elevates both functionality and aesthetics. Ideal for a wide range of applications, the HKD-DL09-SLR combines efficiency, durability, and outstanding light quality to create the perfect lighting experience.

OSRAM

PHILIPS

inventronics

San'an

bridgeLux

LiFUD



DETAIL



CRI 90+



100
lm/W



Lifetime
50.000
hrs



220-240
V AC
50/60Hz



IP20



< 3
SDCM



2700K



3000K



3500K



4000K



5000K



6500K



60°



110°



Anti dazzle
design



No
Flickering



40°C
-20°C



UGR<10

APPLICATIONS

Hotel, Shopping Mall, Office buildings, Retail stores, Airports, Metro stations, Public buildings...

PRODUCT PARAMETERS

Customized Solutions Available

Model No	Power	Size (DxH)	Cut-out	CRI	Lumen
HKD-DL09-SLR-6W-D75	6W	Ø 84x47mm	Ø 75mm	90	600lm
HKD-DL09-SLR-8W-D75	8W				800lm
HKD-DL09-SLR-10W-D75	10W				1000lm
HKD-DL09-SLR-8W-D90	8W	Ø 105x55mm	Ø 90mm		800lm
HKD-DL09-SLR-10W-D90	10W				1000lm
HKD-DL09-SLR-12W-D90	12W				1200lm
HKD-DL09-SLR-12W-D110	12W	Ø 130x58mm	Ø 110mm		1200lm
HKD-DL09-SLR-14W-D110	14W				1400lm
HKD-DL09-SLR-16W-D110	16W				1600lm